From Eye to Insight



SEE BEYOND

Ophthalmic Surgical Microscope Proveo 8



PROVED 8

6

"One of the benefits with Proveo 8 is the way the illumination is achieved by four coaxial LED lights. The optics of the microscope and the innovative additional depth of focus allow us to enhance the ability to visualize the procedure throughout the entire case."

0

PROVEO 8

Dr. Ike Ahmed, University of Toronto, Canada

SEE BEYOND

with the Proveo 8 ophthalmic microscope







Visualization

- Stable red reflex throughout the entire procedure with CoAx 4 coaxial LED illumination
- > Low light, high contrast with adjustable field of illumination diameter via footswitch
- > Superb texture view and high depth of field with FusionOptics
- > Same view for all observers surgeon, assistant and camera

See pages 4 to 7

Efficiency


- > Get an overview of settings at a glance
- > More space to work thanks to small footprint and long reach
- > Individual procedures for each user with Combination Mode
- > Ergonomic adjustments for fatigue-free working

See pages 8 to 9

Upgradeability

- > Built-in 3CMOS HD camera 4K-ready
- > Easy integration of recording and documentation systems
- > Ready for innovative imaging solutions:
 - IOLcompass Pro available from Leica Microsystems
 - Optical Coherence Tomography (OCT)

See page 10

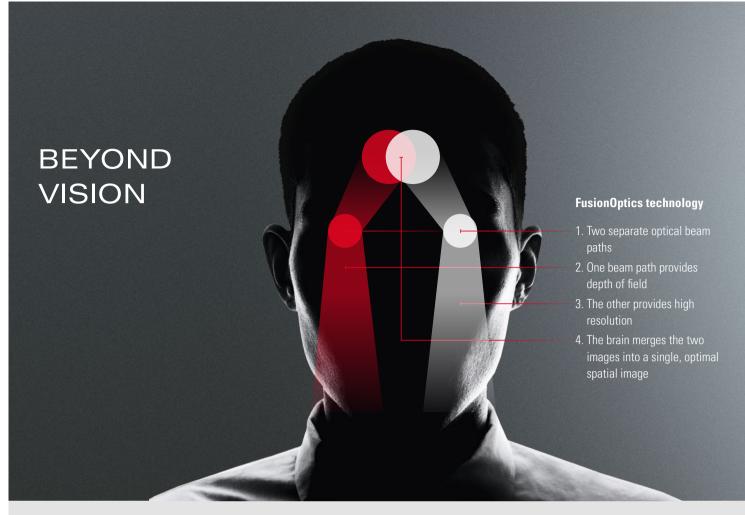

Seeing every fine detail is the basis for achieving the best patient outcome, because you can't treat what you can't see.

The Proveo 8 ophthalmic microscope goes beyond conventional visualization. Its exclusive optical technology provides you with both constant red reflex and a rich texture view, throughout entire anterior and posterior procedures.


Benefit from a texture-rich view: FusionOptics



In posterior segment surgery, you need to carry out extremely precise work, often in low light conditions. Until now, this meant time-consuming refocusing, and limitations in image clarity and detail. Innovative FusionOptics is an exclusive technology from Leica Microsystems that delivers crisp, texture-rich images from the periphery to the retina. FusionOptics captures different information from each of the two beam paths, delivering high resolution to the left eye and depth of field to the right eye. The brain easily merges the visual information into a high-contrast, detailed image with an expanded area in focus.

Rely on consistent red reflex: CoAx 4 illumination

Concentrate on your cataract surgery and rely on consistent red reflex and optimal image contrast throughout the entire procedure with exclusive CoAx 4 coaxial LED illumination. CoAx 4 illumination uses four individual beam paths from two LED lamps. The beam paths all enter the eye at perpendicular angles to the retina which results in a stable red reflex for all observers throughout all steps of cataract surgery. The illumination diameter is adjustable from 4 to 23 mm allowing for optimal alignment of the illumination to each individual patient's eye. This means lower light can be used while still achieving maximum contrast. Even if the eye moves intra-operatively, it remains in the field of illumination.

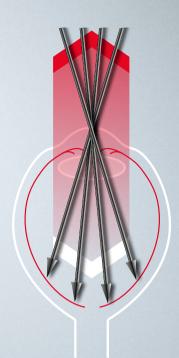









Consistent red reflex during the entire cataract procedure

See more with less light



Featuring a high degree of light transmission, the Optichrome technology of Proveo 8 allows for safe, low light while still delivering high contrast, high resolution and natural colors. Two LED lamps provide direct illumination with a consistent color temperature, light intensity and homogeneity over the complete life cycle of the microscope.

Share the benefits with your team



Proveo 8 makes the red reflex fully visible for all observers. CoAx 4 Illumination includes a common zoom system, which provides the same uncompromised view to main surgeon, assistant, and video.

A shared view of the surgical field with excellent contrast, consistent red reflex, same magnification and 100% stereovision, enhances teaching and collaboration in the OR.



BEYOND VISION

Your benefits for Anterior Surgery

As an anterior surgeon you rely on red reflex as it provides ideal contrast to visualize the posterior capsule, lens and anterior chamber structure. CoAx 4 LED illumination by Leica Microsystems takes your visualization to the next level: It provides consistent red reflex throughout the entire procedure, including phacoemulsification. Additional imaging and guidance technologies support your visualization and information needs during cataract surgery, helping you achieve the best possible patient outcomes.

Assistant fine focus

binocular tube with equal optical performance as main surgeon and camera.


Adjustable illumination diameter Adjust red reflex illumination diameter with the knob or via the wireless footswitch.

Built-in keratoscope



Keratoscope

Activate the integrated Keratoscope via footswitch to qualitatively evaluate the corneal curvature of the eye for astigmatism.





Markerless IOL guidance for minimal residual astigmatism

Get the accurate guidance data you need to achieve precise patient outcomes by choosing the IOLcompass Pro guidance system available from Leica Microsystems. Integration with a choice of accurate topographers means precision from the start. Digital data transfer, sophisticated template registration and tracking, plus intelligent update of your surgical plan in response to changes, all help eliminate potential sources of error, for optimal results.



Choose your ideal position

Change the assistant binoculars from left to right in seconds according to the surgery set-up.

Integrated inverters Automatically activated and synchronized when VR mode is selected

Fine focus for the built-in 3CMOS HD camera

Integrated slit illumination

Motorized internal slit illumination allows continuous adjustment of slit width from 1 mm to 6 mm and slit direction from right to left.

Your benefits for Posterior Surgery

When performing posterior surgery you need to clearly see through the vitreous to every structure of the retina, without frequent refocusing. FusionOptics technology overcomes the boundaries of sight by uniting high resolution and depth of field for a crisp texture-rich view of fine details. A full selection of wide-angle viewing systems further supports your visualization and workflow during vitreoretinal surgery.

Pre-defined modes for posterior surgery

Use the pre-programmed settings for vitreoretinal or vitrectomy procedures. Select with a simple press of the footswitch and the microscope adjusts automatically.



RUV800

The RUV800 retinal wide-angle viewing system with integrated inverter provides the surgeon, assistant and video camera with the same upright view of the retina.



BIOM 5

Choose the BIOM 5 for contact-free, wideangle observation of the fundus during vitreous surgery. Mount the BIOM in a matter of seconds and swing it into the beam path when needed.



External slit illumination

Get full slit functions and precise stereoscopic visualization with the external slit lamp. The slit beam path is adjustable in width and length and can be scanned over the cornea $\pm 23^{\circ}$ from any position via the foot switch.

BEYOND EFFICIENCY

A new way of working that provides you and your team with a relaxed, efficient surgical workflow.

Experience the real meaning of workflow when each step of surgery fits to the next – smoothly, reliably, and efficiently. Concentrate on your surgery and be confident that your equipment is ready and supporting you, when and where you need it at every single moment.



Step by step through your procedure

Typical ophthalmic surgeries are divided into phases, each requiring specific levels of light, focus, and magnification. With the CombinationMode of Proveo 8 you can pre-define and program the settings you need for each phase. During surgery, each tap of the assigned footswitch button will activate the settings for the next phase, limiting workflow interruption.

- > Program up to 5 phases, i.e. for cataract surgery: capsulorhexis, phacoemulsification, irrigation/aspiration, posterior capsule polishing, IOL positioning
- > Choose between 7 different parameters
- > Save individual settings for up to 30 surgeons



All Information at a glance

Easily confirm your current settings with just one glance to the Surgeon Information Panel above the optics carrier. Information includes light settings, magnification, recorder status, focus level and vitrectomy mode.



Select Quick Focus to immediately switch between two different focal planes and Quick Tilt for workflow efficiency in glaucoma procedures

21% longer reach than similar products

Assign handle functions

of each user.

according to the preferences

More space to maneuver

your needs.

With a compact footprint for space-restricted areas and the longest reach on the market, the Proveo 8 offers you more space to work and the flexibility to position as best suits

60

A range of screens available including 27" touch screen

Control recording via infrared remote control, touchscreen control panel, or footswitch



33% smaller footprint than similar products

Smooth, comfortable working

Pre-program the wireless footswitch with key functions and maintain your surgical workflow in a comfortable posture. Switch functions with just a tap of the foot. Functions available include vitreoretinal mode, tilting position, quick focus, and diameter of red reflex illumination. Position the footswitch exactly where you need it thanks to the lightweight, cable-free design.

Ergonomic means efficient

During surgery, your physical well-being can influence your concentration and efficiency. Choose from a large selection of binoculars and three different objective lens types to meet your individual physical requirements and those of your assistant.

Simple to start, fast to finish

Save precious time between surgeries for yourself and your OR team, with easy set-up and fast transition. The intuitive touch-screen control unit makes set-up easy. At the end of the surgery simply move the swing arm up and all microscope functions automatically reset even the recorder stops, and the microscope is ready for the next case.

8.9

BEYOND TOMORROW

Highly efficient for today's challenges – open for tomorrow's technologies.


The Proveo microscope platform allows you to be at the forefront of technology, today and tomorrow. The sleek, fully integrated design of the Proveo 8 houses a highly modular structure that can be individually configured to meet your imaging and guidance needs now and in the future.

Select your imaging technology




Visualization and documentation

Proveo 8 features a built-in 3CMOS High Definition camera with easily accessible fine focus, that is compatible with emerging technologies like 4K. The C-mount adapter also allows use of various 1/3" cameras. Documentation systems such as EVO from MedXchange, imaging technologies, and camera CCUs are easily integrated into the microscope tower.



Markerless IOL guidance

Support your goal of delivering minimal residual astigmatism to your patient with IOLcompass Pro available from Leica Microsystems. The system captures data from your accurate topographer to deliver comprehensive pre-operative planning support and generate precise intra-operative guidance templates that accurately track to your patient's eye.



Optical Coherence Tomography (OCT)

Visualize subsurface ocular microstructures in anterior and posterior surgery with OCT.

- Envisu hand-held solution for high-resolution, real-time images with detail to 3 μm
- EnFocus Ultra-HD iOCT* fine axial resolution below 4 µm, high OCT scan density, and high definition at 2.5 mm image depth in tissue



TECHNICAL SPECIFICATIONS

Optics and Illumination

•	
FusionOptics	For increased depth of field and high resolution
	for main surgeon and assistant
OptiChrome optics	For high contrast, high resolution, natural colors
	without chromatic aberrations
Magnification	6:1 zoom, motorized
Total magnification	4.1× to 24.5× with 10× eyepiece
	5.1× to 30.7× with 12.5× eyepiece
Focus range	75 mm
Objective /	WD 175 mm/f = 200 mm
working distance	WD 200 mm/f = 225 mm
	WD 225 mm/f = 250 mm
	WD: Working distance, f: Focal length
Field of view	51.4–8.6 mm Ø with 10× eyepiece
Eyepieces	Wide-field eyepieces for persons wearing
	glasses 8.3×, 10× and 12.5× dioptric adjustment,
	±5 diopter settings, adjustable eyecup
Direct illumination	Main light
with 2 LED lamps	> Integrated LED illumination system for inten-
	sive uniform illumination of the field of view
	> Continuously adjustable brightness with
	halogen-like color temperature
	CoAx 4 coaxial illumination
	> Illumination unit for generating a clear and
	stable Red Reflex, decreasing stray light
	through the sclera and increasing the image
	contrast
	> Integrated keratascope and slit illumination
Adjustable CoAx 4	Diameter of coaxial illumination is adjustable
	between 4 and 23 mm via footswitch
Fine focus	Available for assistant and integrated camera or
	external 1/3 camera with C-mount interface

Upgradeability

OpenArchitecture	Prepared for integration of video camera sys-
	tems, digital recording systems, and monitors
Connectors	> Numerous built-in connectors for video and
	control data transfer
	> Internal power supply 12 VDC, 19 VDC, 24
	VDC and AC terminals
2D/3D HD Video	Optional fully integrated 2D HD and/or 3D HD
	video and recording

Maneuverability

Optics	> 380° rotation
	> 15° /+ 105° motorized inclination tilt
XY speed	Zoom linked XY speed
XY range	62 × 62 mm
Balancing	Adjustable gas spring via balancing knob
Brakes	Floor stand with 4 electromagnetic brakes
Monitor arm	860 mm flexible arm with 4 axis for rotation and
	inclination, max. weight 15 kg and up to 32"
Control	
Control unit	> User-friendly, individually programmable
	touch-screen (up to 30 surgeons) for control of
	motor functions and light intensity
	> Menu selection based on unique software for
	user-specific configuration
	> Built-in electronic auto-diagnosis and user
	support
	> Software independent hard keys and indicator
	for illumination
	> Data shown by means of LCD
Control elements	> Rotary handles
	> 14-function wireless footswitch with optional
	back-up cable
IR sensor	Remote control of the HDR recorder
Indicators	LED for video record status
	Surgeon information panel for setting status

Construction


690×690 mm with four 360° rotating castors with
a diameter of 150 mm each, one parking brake
> Coated with antimicrobial paint
> Conforming with RoHS
Max. 10.5 kg from microscope dovetail ring
interface
Approx. 350 kg without load


Technical data

Power connection	> 1100 VA 50/60 Hz
	> 100–240 V~ 50/60 Hz
	> 2 × T10 AH 250 V
Protection class	Class 1

From Eye to Insight



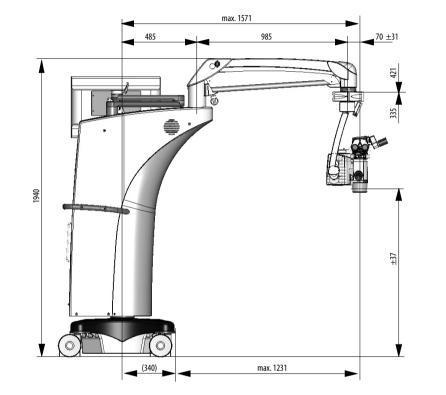

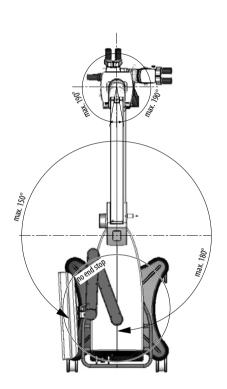

REGULATIONS AND STANDARDS

Class I surgical microscope Leica Proveo 8 incl. accessories > Council Directive 93/42/EEC onMedical Devices (MDD) and its amendments. > IEC 60601-1 / EN 60601-1 Medical Electronical Equipment, Part 1: General requirements – including national differences of EU, CA, US.

> IEC 60601-1-2 / EN 60601-1-2 Electromagnetic Compatibility.

The Medical Division, within Leica Microsystems (Schweiz) AG, holds the management system certificates for the international standards ISO 9001, ISO 13485, and ISO 14001 relating to quality management, quality assurance and environmental management.

Leica Microsystems (Schweiz) AG · Max Schmidheiny Strasse 201 · CH-9435 Heerbrugg T +41 71 726 3333 · F +41 71 726 3399

CONNECT CE WITH US!



www.leica-microsystems.com